

# *HydroFLOW*® *hs40*

CHEMICAL-FREE TREATMENT FOR DOMESTIC SWIMMING POOLS AND SPAS



*HydroFLOW*®  
U.S.A.

# HydroFLOW® hs40



The hs40 is designed to improve the water quality of pools, hot tubs, spas, small ponds and water features.

The hs40 reduces pathogen levels, chemical usage, filter backwash frequency and chlorine smell, while improving water clarity.

The hs40 easily fits around existing pipework, generally on the inlet to the pump which feeds the filter. The unit can be installed around pipes of up to 2.5" outer diameter (OD).





BEFORE



AFTER

## SPECIFICATIONS

- Signal monitor light
- PSU: Input 110-240V AC
- Unit: Input 12V AC/DC
- Max power: 1.2 W
- Weight approx: 10.5 oz
- Dimensions: H 5.98" x W 4.65" x D 1.77"
- Maximum pipe diameter: 2.5" OD
- Electrical cable length: 9'

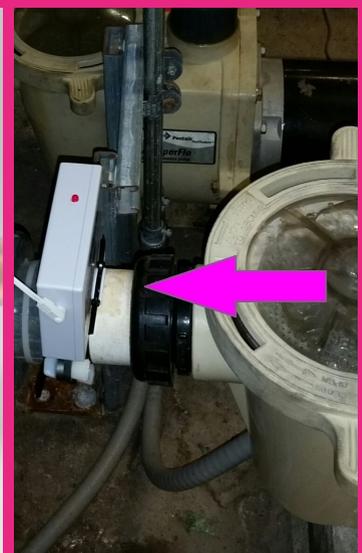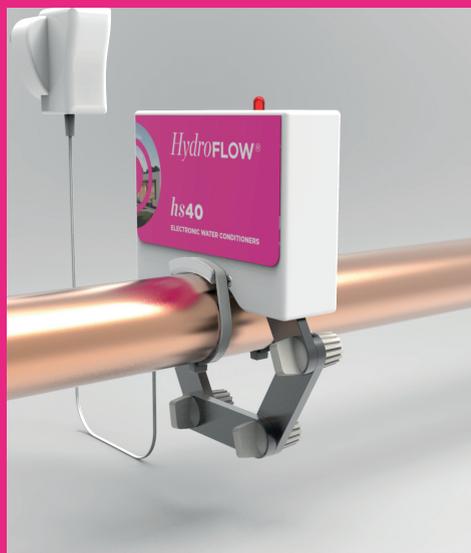

## FROM COMBI BOILERS TO COOLING TOWERS

HydroFLOW units are installed all over the world on multiple applications, treating carbonate and non-carbonate scaling and filtration issues in a wide variety of industries. Check out our website for more information: [www.hydroflow-usa.com](http://www.hydroflow-usa.com)

- From homes to heavy industry
- From spas to steel mills
- Suitable for any pipe material
- From 1" to 108" OD pipe diameter



LIMESCALE



BIOFOULING



FLOCCULATION

